

6

5

4

3

2

1



REV	ZONE	ECN	REVISION DESCRIPTION	DATE	ENG
B	...	...	Redrawn in Solidworks	03/22	NA

D


C

B



A

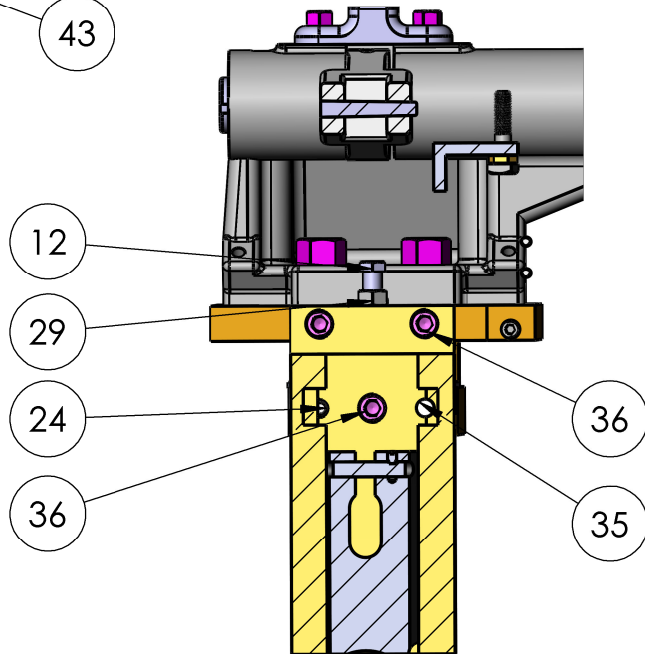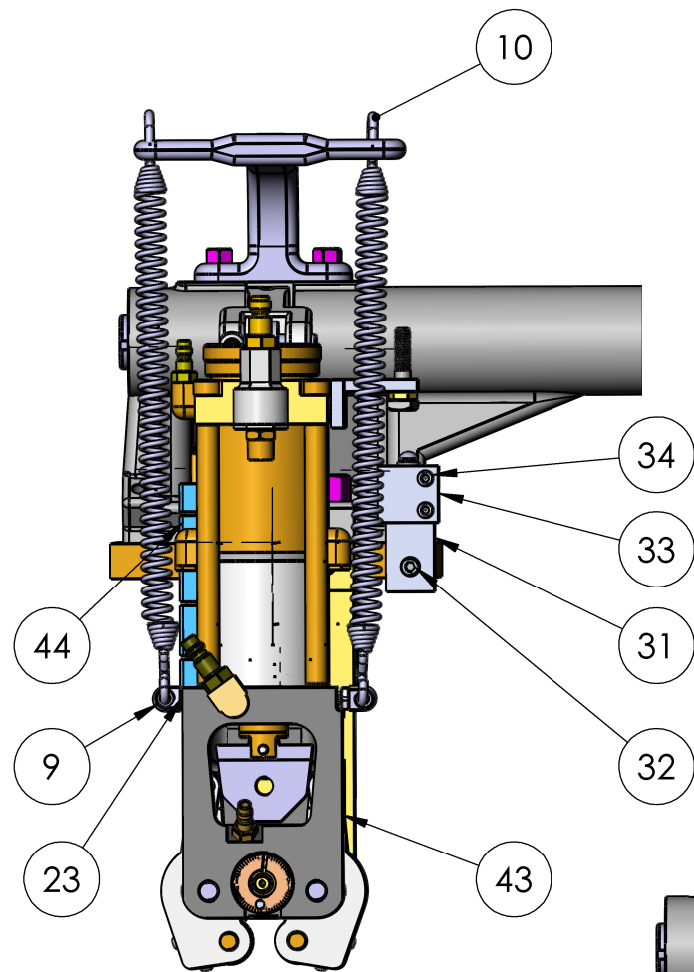

SECTION B-B

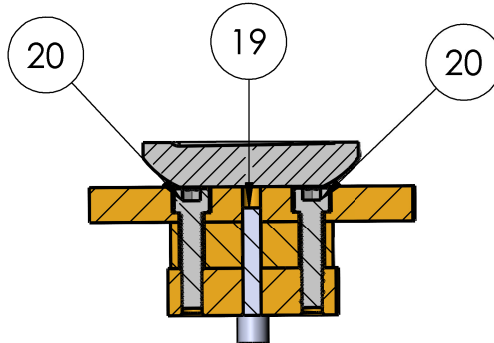


SECTION A-A

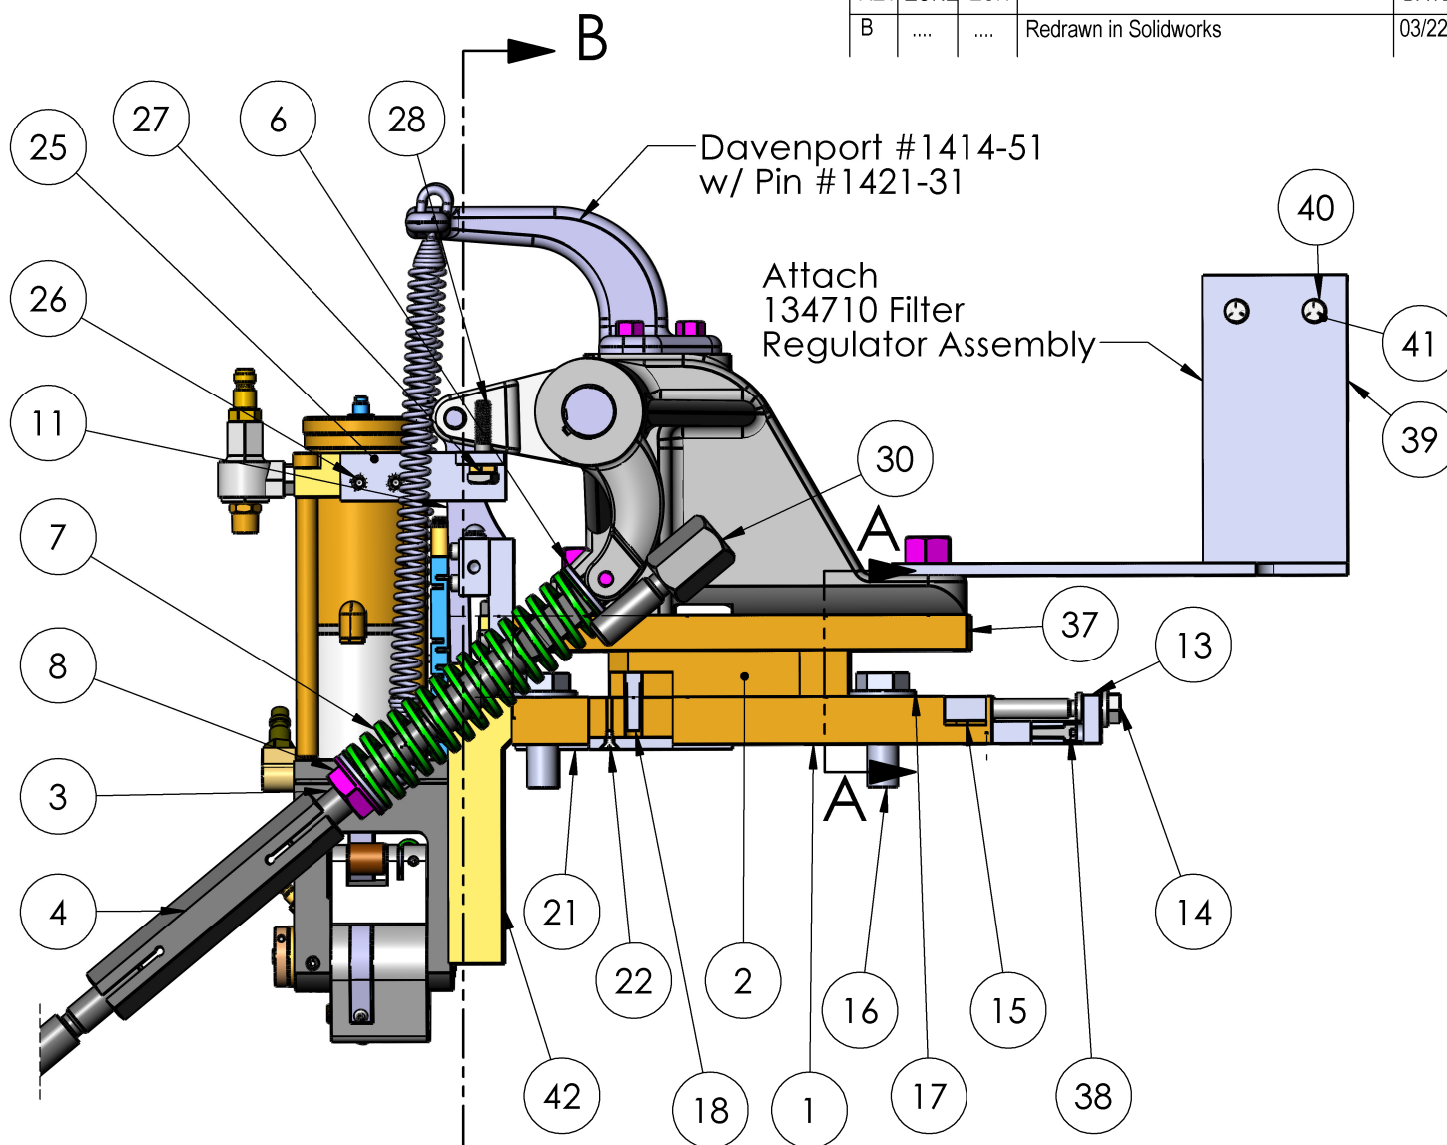

THIS DRAWING IS THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF C.J. WINTER MACHINE TECHNOLOGIES, INC. AND MAY NOT BE COPIED, REPRODUCED, OR DISCLOSED IN ANY WAY, WHATSOEVER, TO ANYONE WITHOUT THE EXPRESS WRITTEN PERMISSION OF C.J. WINTER MACHINE TECHNOLOGIES, INC. UNLAWFUL DISCLOSURE MAY RESULT IN PROSECUTION
© 2004 C.J. WINTER MACHINE TECHNOLOGIES, INC.

UNLESS OTHERWISE SPECIFIED:
DRAWING MUST COMPLY TO
C. J. WINTER ENGINEERING
STANDARD E1058 & ASME
Y14.5M 1994. UNTOLERANCED
DIMENSIONS ARE BASIC



DRAWN BY:
DWG DATE:
ENG. APPR:
APPR DATE:
MATERIAL:
HEAT TRT:



C. J. WINTER
MACHINE TECHNOLOGIES, INC.

Davenport 4th Position

DWG SIZE
SCALE: 1:4
B
Sheet1
DRAWING NO.
134955

6

5

4

3

2

1

6				5		4		3		2			1		
ITEM NO.	PART NO.	DESCRIPTION	QTY.	ITEM NO.	PART NO.	DESCRIPTION	QTY.		REV	ZONE	ECN	REVISION DESCRIPTION	DATE	ENG	
1	134020	Base	1	25	134024	Trip Bracket	1		B			Redrawn in Solidworks	3/22	NA	
2	134021	Riser	1	26	125087	Screw: SHCS 1/4-20 x.500	2								
3	134047	Spring Shaft	1	27	140307	Jam Nut, 5/16-18	1								
4	134048	Turn Buckle	1	28	140308	Square Head Screw	1								
5	134049	Cam Lever	1	29	134052	Nut: Hex, 3/8-24, .3125 Thick	1								
6	134050	Washer: Flat, .75 dia (3/4")	2	30	134076	Spring Shaft Extension	1								
7	134051	Spring	1	31	143044	Mounting Plate 5-1/4 RAC-6	1								
8	134053	Flange Nut	1	32	160022	Screw: SHCS, 1/4-28 x .875	1								
9	134096	Bolt: SWB, .250-20 x 1.50 x .250 dia	2	33	125404	Control Valve (3 way)	1								
10	134031	Spring	2	34	141427	Screw: SHCS, #10-32 x 1.000	2								
11	134045	Dead Stop	1	35	134034	Pin: Diamond .375 x 1.000	1								
12	134046	Stop Bolt 3/8-24 x 1-1/4"	1	36	140311	Screw: SHCS, 3/8-16 x 1.000	3								
13	134229	4th Position Adjustment Body	1	37	134022	Top Plate	1								
14	134230	4th Position Adjustment Screw	1	38	134086	Screw: SHCS, 1/4-20 x 2.000	2								
15	134231	4th Position Adjustment Slide	1	39	134084	Control Valve Bracket	1								
16	134037	Bolt: Hex Head, 5/8-11 x 2.00	3	40	134055	Star Lock Washers	2								
17	134043	Washer: Flat, .625 dia	3	41	134085	Bolt: Hex, .25-20 x .375	2								
18	134036	Pin: Diamond, .375 x2.250	1	42	134063	Base	1								
19	134036-M	Pin: Dowel, .375 dia. x 2.250	1	43	134925	134SA attachment	1								
20	134044	Screw: SHCS, 1/2-13 x 2.000	3	44	134058	Expansion Gib	1								
21	134030	Key	1	Serial No. Range 134493-Current											
22	130028	Screw: FHCS, #10-32 x .375	1												
23	125056	Stop Nut	2												
24	140359	Pin: Dowel, .375 dia x 1.00	1												
THIS DRAWING IS THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF C.J. WINTER MACHINE TECHNOLOGIES, INC. AND MAY NOT BE COPIED, REPRODUCED, OR DISCLOSED IN ANY WAY, WHATSOEVER TO ANYONE WITHOUT THE EXPRESS WRITTEN PERMISSION OF C.J. WINTER MACHINE TECHNOLOGIES, INC. UNLAWFUL DISCLOSURE MAY RESULT IN PROSECUTION © 2004 C.J. WINTER MACHINE TECHNOLOGIES, INC.				UNLESS OTHERWISE SPECIFIED: DRAWING MUST COMPLY TO C. J. WINTER ENGINEERING STANDARD E1058 & ASME Y14.5M 1994. UNTOLERANCED DIMENSIONS ARE BASIC				DRAWN BY: DWG DATE:		 C. J. WINTER MACHINE TECHNOLOGIES, INC.		DWG SIZE		SCALE: 1:4	
ENG. APPR: APPR DATE:		MATERIAL: HEAT TRT:		DRAWING NO. 134955											
										Davenport 4th Position					
6				5		4		3		2			1		